



2 At A Time Half-Square Triangles (HST)




The cutting sizes provided are oversized to allow for trimming. Make a test sample using scrap fabric to see if you have enough to trim along all four sides and if you don't, add another 1/8" to 1/4" to the measurement and make another sample. Before cutting the actual fabric for your project, it's advised to starch the yardage before cutting squares.


1. Select your finished unit size and then find the square cutting sizes. Cut the squares needed.

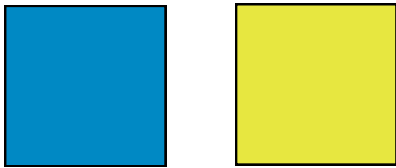


2. Draw a line diagonally & corner to corner on the wrong side of the lightest color square.

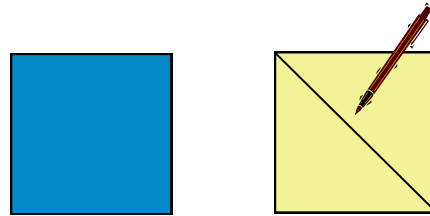


3. Place pairs of squares "right sides together" RST and all edges are even.




4. Stitch 1/4" on each side of the drawn line. You can use the iron to press (up & down motion) the squares before it's cut apart.





5. Cut apart on the drawn line.



5. Finger press the seams to one side. Do not use the iron to press the seams to one side because this will stretch & distort the units.

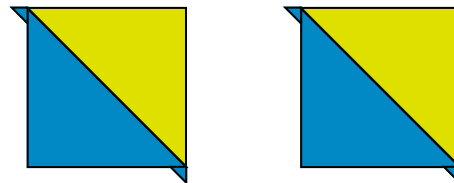

7. Place your Bloc-Loc Ruler on the HST (right side up) and the groove is locked onto the seam allowance. Trim the first two sides, turn the ruler around and then trim the remaining two sides.



Refer to the video in the "rulers" tab, "How to Square up a half-square triangle"